


PLA-AE24NL & PUZ-AH24NL
24,000 BTU/H CEILING CASSETTE INDOOR UNIT
23,600 BTU/H HEAT PUMP OUTDOOR UNIT



Job Name:

System Reference:

Date:

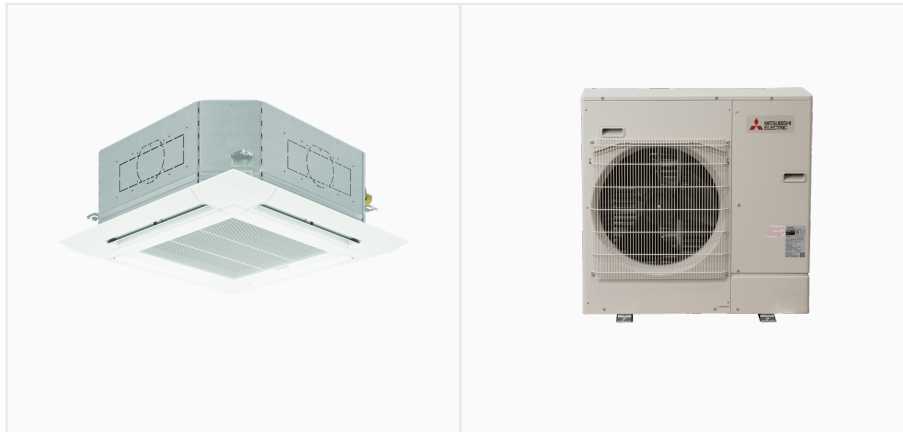

INDOOR Unit ... PLA-AE24NL
OUTDOOR Unit ... PUZ-AH24NL

INDOOR UNIT FEATURES

- **3D i-see Sensor® (Built-in):** This advanced sensor scans the room for occupancy, then adjusts temperature and airflow based on user preferences, and saves energy when a room is empty.
- **Swing Mode:** An indoor unit with this capability can move air throughout the room like an oscillating fan.
- **Light Commercial:** Light commercial applications include small offices, restaurants, and retail.
- **Horizontal Vane Control:** Horizontal Vane Control allows the indoor unit vanes to be moved left right to provide even temperatures throughout a space.
- **Ventilation Air Intake:** A duct opening is provided, which allows outside air to be brought inside so it can be heated or cooled.
- **Condensate Lift Mechanism:** A built-in condensate lift mechanism removes water that is collected during operation and reduces the need for an additional pump to remove condensate water.

OUTDOOR UNIT FEATURES

- **Inverter Driven Compressor:** Inverter technology uses only the precise amount of energy needed to keep a space comfortable.
- **Blue Fin Coating:** Anti-corrosion coating that protects the outdoor heat exchanger against salt, sulfur, and other airborne contaminants that impact the efficiency and performance of the outdoor units.
- **Seacoast Protection:** Designed to protect against the corrosive effects of environments that are in close proximity to the sea.

SPECIFICATIONS: PLA-AE24NL & PUZ-AH24NL

Cooling at 95F ¹	Maximum Capacity	Btu/h	24500
	Rated Capacity	Btu/h	24000
	Minimum Capacity	Btu/h	10300
	Maximum Power Input	W	1860
	Rated Power Input	W	1810
	Moisture Removal	Pints/h	4
	Sensible Heat Factor		0.82
Heating at 47F ²	Power Factor [208V / 230V]	%	97 / 97
	Maximum Capacity	Btu/h	31600
	Rated Capacity	Btu/h	29000
	Minimum Capacity	Btu/h	8400
	Maximum Power Input	W	2320
	Rated Power Input	W	2073
Heating at 17F ³	Power Factor [208V / 230V]	%	98 / 98
	Maximum Capacity	Btu/h	15700
	Rated Capacity	Btu/h	15700
	Maximum Power Input	W	1520
Heating at 5F ⁵	Rated Power Input	W	1520
	Maximum Capacity	Btu/h	11500
Heating at -4F ⁶	Maximum Power Input	W	1600
Heating at -13F ⁹	Maximum Capacity	Btu/h	10300
Efficiency	SEER2		22.6
	EER2 ¹		13.20
	HSPF2 [IV]		9.80
	COP at 47°F ²		4.10
	COP at 17°F at Maximum Capacity ³		3
	COP at 5°F at Maximum Capacity ⁵		2.10
	COP at -4°F at Maximum Capacity ⁶		1.96
	COP at -13°F at Maximum Capacity ⁹		
Electrical	ENERGY STAR® Certified		Yes
	Voltage, Phase, Frequency	V AC / V AC , Ø , Hz	208 / 230 , 1 , 60
	Guaranteed Voltage Range	V AC	198 - 253
	Voltage: Indoor - Outdoor, S1-S2	V AC	208/230
	Voltage: Indoor - Outdoor, S2-S3	V DC	12-24
	Short-circuit Current Rating [SCCR]	kA	5
	Recommended Fuse/Breaker Size (Outdoor)	A	25
	Recommended Wire Size [Indoor - Outdoor]	AWG	14
Indoor Unit	Fan Motor Output	W	120
	Fan Motor Type		DC Motor
	Airflow Rate at Cooling, Dry	CFM	530 , 640 , 710 , 810
	Airflow Rate at Heating, Dry	CFM	530 , 640 , 710 , 810
	Sound Pressure Level [Cooling]	dB (A)	28 , 30 , 33 , 36
	Sound Pressure Level [Heating]	dB (A)	28 , 30 , 33 , 36
	Dual Barrier Coating on Fan		No
	External Finish Color		1.0Y 9.2/0.2
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	33-1/16 x 33-1/16 x 11-3/4 [840 x 840 x 298]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	34-5/16 x 35-9/16 x 15 [871 x 903 x 381]
	Unit Weight	lbs [kg]	57 [26]
IDU Operating Temp. Range	Package Weight	lbs [kg]	82 [37]
	Cooling Intake Air Temp [Maximum / Minimum]	deg F , deg F / deg F , deg F	90 , 73 / 66 , 59
	Heating Intake Air Temp [Maximum / Minimum]	deg F	82 / 50
Outdoor Unit	MCA	A	22
	MOCP	A	37
	Fan Motor Output	W	74

Notes

¹Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test

²Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB

³Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB

⁵Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB

^{*}Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Heat pump system with wind baffle: 0°F - 115°F. • Refer to wind baffle documentation for further information.

^{**}Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures.

⁶Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB

SPECIFICATIONS: PLA-AE24NL & PUZ-AH24NL

Outdoor Unit	Airflow Rate Cooling	CFM	1940
	Airflow Rate Heating	CFM	1940
	Defrost Method		Reverse Cycle
	Coating on Heat Exchanger (Bluefin, Sea Coast)		Yes , Yes
	Sound Pressure Level, Cooling ¹	dB (A)	49
	Sound Pressure Level, Heating ²	dB (A)	52
	Compressor Type		Twin Rotary
	Compressor Model		SRB172FQHMC-L1
	Compressor Oil [Type // Charge]	// oz	RM68EH // 23
	External Finish Color		Munsell 3Y 7.8/1.1
	Base Pan Heater		Optional
	Unit Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	37-13/32 x 13-31/32 x 37-1/8 [950 x 355 x 943]
	Package Dimensions (W x D x H)	inch x inch x inch [mm x mm x mm]	41-15/16 x 17-3/4 x 42-1/2 [1065 x 450 x 1079]
	Unit Weight	lbs [kg]	155 [70]
	Package Weight	lbs [kg]	179 [81]
ODU Operating Temp. Range	Cooling Intake Air Temp [Maximum / Minimum*]	F	115 / 23
	Heating Intake Air Temp [Maximum / Minimum]	F , F / F , F	70 , 59 / -4 , -4
	Heating Thermal Lock-out / Re-start Temperatures**	F	-13 / -4
Refrigerant	Type		R454B
	Pre-Charged Refrigerant Amount	lbs , oz	7 , 11
	Maximum Pre-Charged Piping Length	ft [m]	165 [50]
	Additional Refrigerant Charge Per Additional Piping Length	oz/ft	0
Piping	Gas Pipe Size O.D. [Flared]	inch [mm]	5/8 [15.88]
	Liquid Pipe Size O.D. [Flared]	inch [mm]	3/8 [9.52]
	Maximum Piping Length	ft [m]	165 [50]
	Maximum Height Difference	ft [m]	100 [30]
	Maximum Number of Bends		15
Notes ¹ Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB - test ² Heating at 47°F (Indoor // Outdoor) °F 70 DB, 60 WB // 47 DB, 43 WB ³ Heating at 17°F (Indoor // Outdoor) °F 70 DB, 60 WB // 17 DB, 15 WB ⁵ Heating at 5°F (Indoor // Outdoor) °F 70 DB, 60 WB // 5 DB, 4 WB *Indoor/Outdoor Unit Operating Temperature Range (Cooling Air Temp [Maximum / Minimum]): • Wind baffles required to operate below 23°F DB in cooling mode. • Heat pump system with wind baffle: 0°F - 115°F. • Refer to wind baffle documentation for further information. **Outdoor Unit Operating Temperature Range (Cooling Thermal Lock-out / Re-start Temperatures; Heating Thermal Lock-out / Re-start Temperatures): • System cuts out in heating mode and automatically restarts at these temperatures. ⁶ Heating at -4°F (Indoor // Outdoor) °F 70 DB, 60 WB // -4 DB, -5 WB			


INDOOR UNIT ACCESSORIES: PLA-AE24NL

3D Flow	3D Total Flow Unit	☐	PLP-U160ELR-E
Casement	Multi-function casement	☐	PAC-SJ41TM-E
Condensate	Blue Diamond Sensor Extension Cable 15 Ft	☐	C13-103
	Blue Diamond MegaBlue Condensate Pump with Reservoir Sensor 115-230V up to 170k BTU/h	☐	X87-835
	Blue Diamond (MaxiBlue Advanced) Mini Condensate Pump w/ Reservoir & Sensor (110V) up to 48,000 BTU/H [recommended]	☐	X87-711
	Refco Condensate Pump 100-240V up to 120k BTU/h	☐	COMBI
	Sauermann Condensate Pump 120-230V up to 60k BTU/h	☐	SI30-230
	Blue Diamond MaxiBlue Condensate Pump with Reservoir Sensor 115-230V up to 48k BTU/h	☐	X88-721
Control Interface	Thermostat Interface for 3rd Party Thermostats	☐	PAC-US445CN-1
	Operation and Error Status Output Adapter	☐	PAC-SF40RM-E
	IT Extender	☐	PAC-WHS01IE-E
	Airzone Wired Blueface Controller White	☐	AZZBSBLUEZEROCB
	Airzone Wireless Think Controller White	☐	AZZBSTHINKRB
	Airzone Wired Blueface Controller Black	☐	AZZBSBLUEZEROCN
	Airzone Wireless Lite Controller White	☐	AZZBSLITERB
	Airzone Wireless Think Controller Black	☐	AZZBSTHINKRN
	Airzone Wireless Lite Controller Black	☐	AZZBSLITERN
	Procon BACnet® and Modbus® Interface	☐	PAC-UKPRC001-CN-1
	kumo station® for Comfort app	☐	PAC-WHS01HC-E
Disconnect Switch	(30A/600V/UL) [fits 2" X 4" utility box] - White	☐	TAZ-MS303W
	30A600VUL fits 2 X 4 utility box - Black	☐	TAZ-MS303
Filter	High efficiency filter element (requires PAC-SJ41TM-E)	☐	PAC-SH59KF-E
Grille	Grille (3D i-See sensor panel)	☒	PLP-41EAEU
Lineset	3/8 x 5/8 Lineset Twin-Tube Insulation - 15 feet	☐	MPLS385812T-15
	3/8 x 5/8 Lineset Twin-Tube Insulation - 100 feet	☐	MPLS385812T-100
	3/8 x 5/8 Lineset Twin-Tube Insulation - 30 feet	☐	MPLS385812T-30
	3/8 x 5/8 Lineset Twin-Tube Insulation - 10 feet	☐	MPLS385812T-10
	3/8 x 5/8 Lineset Twin-Tube Insulation - 50 feet	☐	MPLS385812T-50
	3/8 x 5/8 Lineset Twin-Tube Insulation - 65 feet	☐	MPLS385812T-65
N/A		☐	Unknown
Remote Sensor	Flush Mount Remote Temperature Sensor for SEZ SLZ SVZ and all P-Series models	☐	PAC-USSEN002-FM-1
	Wireless temperature and humidity sensor for Comfort app	☐	PAC-USWHS003-TH-1
	Wall Mounted Remote Temperature Sensor	☐	PAC-SE41TS-E
Shutter Plate	Air outlet shutter plate	☐	PAC-SJ37SP-E
Terminal Signal Adapter	5-Pin Wiring Harness	☐	PAC-725AD
	3-Pin Wiring Harness	☐	PAC-715AD
	Backup Heat Relay Kit	☐	CN24RELAY-KIT-CM3
Wired Remote Controller	Touch MA Remote Controller	☐	PAR-CT01MAU-SB
	Deluxe MA Wired Remote Controller	☐	PAR-42MAAUB
	Simple Direct Wired Remote Controller	☐	PAC-SDW01RC-1
	Simple MA Remote Controller	☐	PAC-YT53CRAU-J
Wireless Remote Controller	Lockdown Bracket for Wireless Handheld Remote Controllers	☐	RCMKP1CB
	Wireless RedLINK™ Remote Controller	☐	MHK2
	Wireless Remote Receiver Panel	☐	PAR-SR3LA-E
	Wireless signal receiver (corner panel) (for PAR-SL101A-E / PAR-FL32MA)	☐	PAR-SR4LU-E
	Wireless Remote Controller	☐	PAR-SL101A-E
Notes			


OUTDOOR UNIT ACCESSORIES: PUZ-AH24NL

Air Outlet Guide	Air Outlet Guide 1 Piece	☐	PAC-SG59SG-E
Centralized Drain Pan	Centralized Drain Pan	☐	PAC-SG64DP-E
Control/Service Tool	M- & P-Series Maintenance Tool Cable Set	☐	M21EC0397
	ControlService Tool	☐	PAC-SK52ST
Drain Socket	Drain Socket	☐	PAC-SG61DS-E
Hail Guards	Hail Guard	☐	HG-A6
M-NET Converter	M-Net Interface for P-Series	☐	PAC-SJ95MA-E
Mini-Split Wire	14 Gauge 4 wire Armored MiniSplit Cable250 ft roll	☐	SW144-250
	14 Gauge 4 wire Armored MiniSplit Cable50 ft roll	☐	SW144-50
	14 Gauge 4 wire MiniSplit Cable250 ft roll	☐	S144-250
	14 Gauge 4 wire MiniSplit Cable50 ft roll	☐	S144-50
Mounting Pad	Condensing Unit Mounting Pad 24 x 42 x 3	☐	ULTRILITE2
Optional Defrost Heater	Optional Defrost Heater	☐	PAC-SK62BH-E
Snow/Rain Diverter	SnowRain Diverter	☐	SRD-4
Stand	Outdoor Unit Stand 12 High	☐	QSMS1201M
	18 Single Fan Stand	☐	QSMS1801M
	24 Single Fan Stand	☐	QSMS2401M
	Condenser Wall Bracket - Stainless Steel Finish	☐	QSWBSS
	Outdoor Unit 3-14 inch Mounting Base Pair - Plastic	☐	DSD-400P
	Condenser Wall Bracket	☐	QSWB2000M-1
Terminal Signal Adapter	5-Pin Wiring Harness	☐	PAC-725AD
	3-Pin Wiring Harness	☐	PAC-715AD
Wind Baffle	Side Advanced Wind Baffle	☐	WB-SD5
	Rear Wind Baffle	☐	WB-RE5
	Front Wind Baffle	☐	WB-PA5
Notes			

INDOOR UNIT DIMENSIONS: PLA-AE24NL

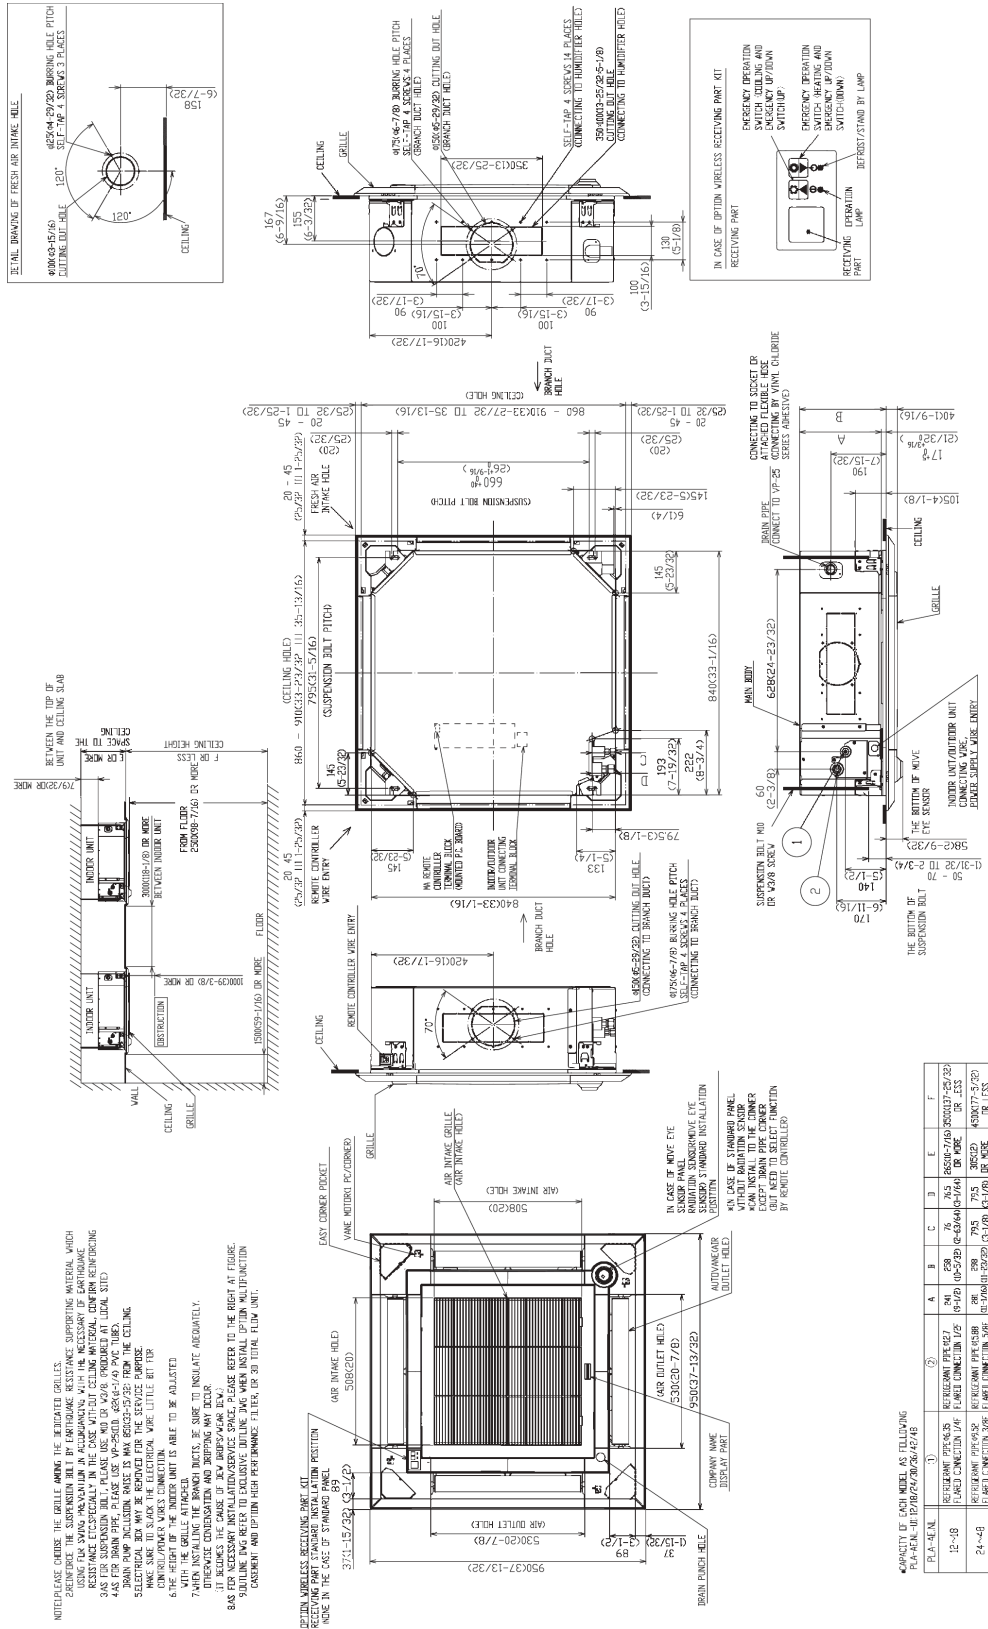[illegible]

OUTDOOR UNIT DIMENSIONS: PUZ-AH24NL

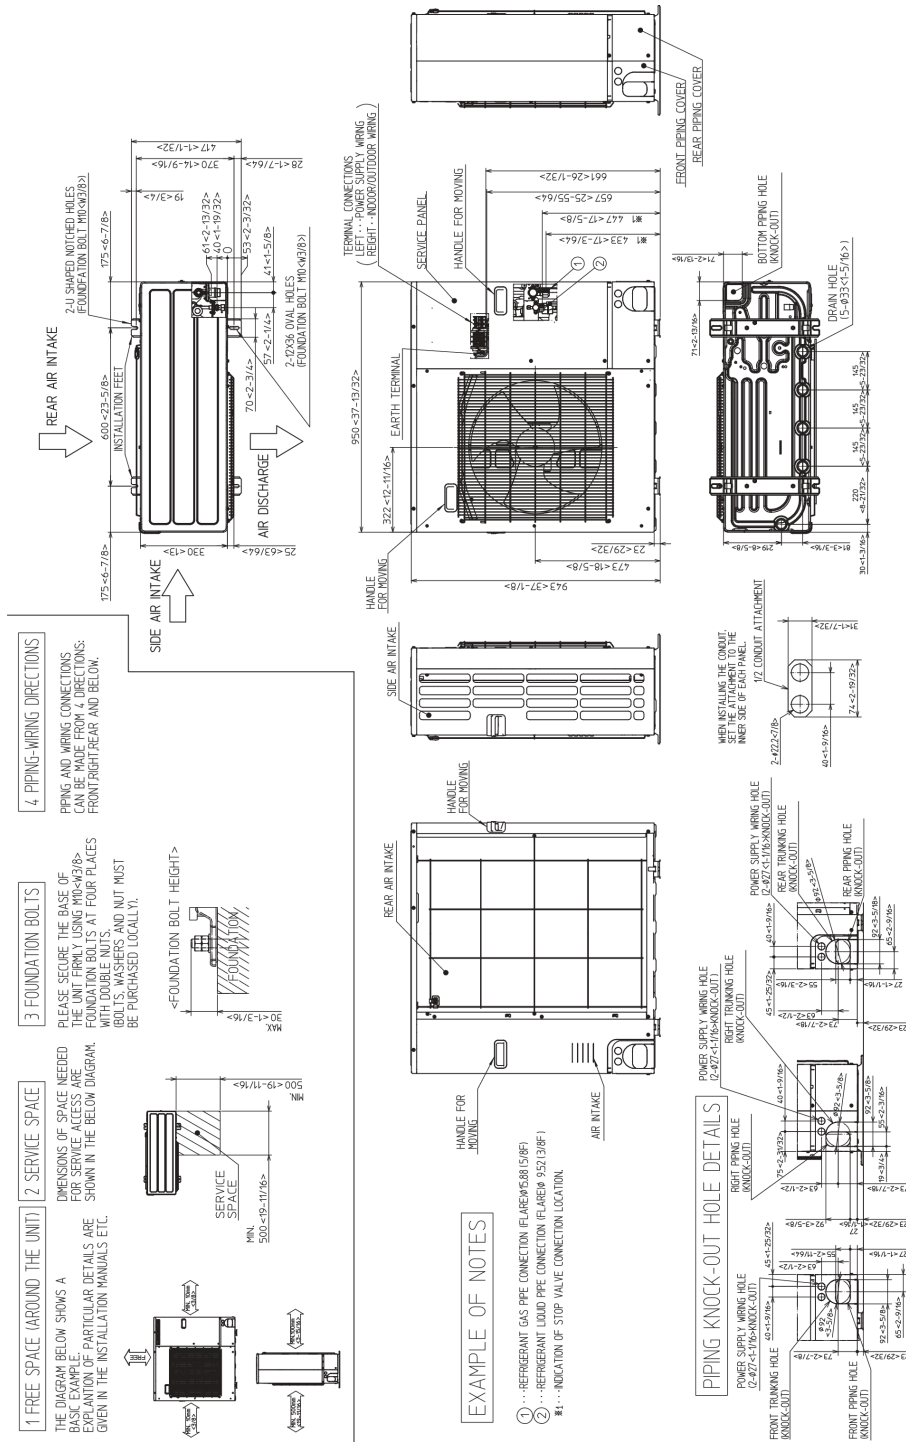

1340 Satellite Boulevard Suwanee, GA 30024
Toll Free: 800-433-4822 · mitsubishicomfort.com

METUS_2026-04_PROPIN

